

## RCJ33 Flush-mounted receiver low voltage

bidi

The bidirectional RCJ33 flush-mounted receiver is designed for switching low-voltage devices with a potential-free changeover contact. Up to 32 transmitters can be taught in.

In addition, a button input is available for local wired operation.

Programming is simply done on the device by pressing a button or via radio using remote programming (POTA).

In addition to the ON/OFF function, the operating modes LOGIC, DEADMAN and TIMER (adjustable from 1 second to 30 hours) can be used.

The flat design facilitates installation in flush-mounted sockets, behind switches or behind sockets.




RCJ33EN5001A01-K

### Technical specifications

Coding	Easywave neo Up to 32 transmitters can be programmed POTA
Frequency	868.30 MHz
Channels	1
Power supply	12-24 VAC/DC
Power consumption (at 24V AC)	0.2W standby 1.0W relay switched (without load)
Operating modes	ON/OFF (2-button operation) ON/OFF (1-button operation) TIMER (adjustable) LOGIC DEAD MAN
Input	1 external button
Output	1 potential-free relay contact (changeover)
Maximum contact load	
- AC	60V/1A/30 VA
- DC	30V/1A/30 VA
Operating temperature	-20 °C to +45 °C
Dimensions	43 x 42 x 17.5mm

### Wiring diagram

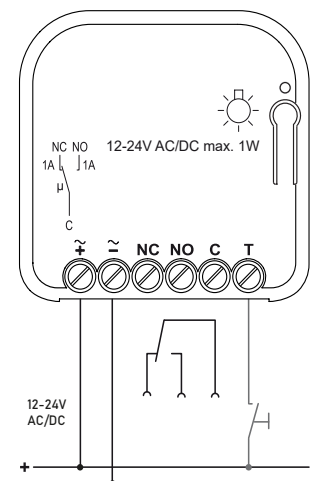

### Scope of delivery

- Flush-mounted receiver
- Operating manual
- Quick start guide

### Models

Product numbers	Description
RCJ33EN5001A01-K	Flush-mounted receiver 1-channel, 12-24 V, potential-free changeover contact